

TSM281WD

IPS Security Container

Product Data Sheet

TECHNICAL SPECIFICATIONS

| | |
|-----------------|--|
| Model | TSM281WD |
| Rec. Heat Load: | 300 – 1000 Watts |
| Rack: | 13Ux25"D roll-out rack, 500lb capacity |
| Weight: | 1145lbs |
| Dimensions: | 28.5"H x 27"W x 45"D* add 2.75" to width for vents add 4.6" to depth for handle & cable exit *(Custom Depths Available) |
| Door Opening: | 25.75"H x 24.25"W |
| Internal Space: | 27.75"H x 26.25"W x 34.75"D |
| Power: | 115VAC, 50/60Hz, 1.0A (cooling fans) |
| Noise Levels: | 12dBA at 75°F up to 42dBA at 95°F |
| Cable Count: | Up to 35 (Cat5) incoming "Black" Up to 75 (Cat5) outgoing "Red"** **(Optional Enlarged Cable Entry Available) |

GSA CLASS 5 FEDERAL SPECIFICATIONS:


PHYSICAL PROTECTION: Federal Specification AA-C-2786
20 man-hours against surreptitious entry
30 man-minutes against covert entry
10 man-minutes against forced entry

LOCK SPECIFICATION: Federal Specification FF-L-2740
Approved Locks: Kaba Mas X-10 and S&G 2740



FEATURES AT A GLANCE

- GSA approved alternative to CAA or facility build-out
- Highest level class 5 physical protection available
- 13Ux25"D roll-out rack with removable service tracks
- Ultra quiet temperature controlled cooling system
- Two feed-thru style cable entries for Red/Black separation
- Mounting bracket for optional PDS junction box
- 5-outlet power strip with 15ft cord included
- Flat bottom design reduces floor loading

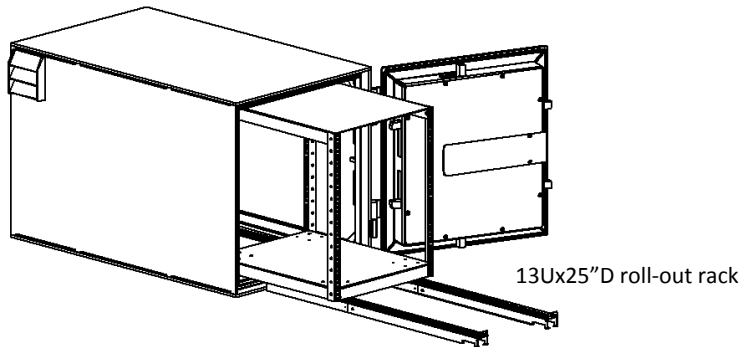

OPTIONS & ACCESSORIES

| Part No. | Description |
|----------------|---|
| TSM1926-SLSF | Slide Shelf for 19" Rack, 2U, 26"D |
| TSM1926-FSF | Fixed Shelf for 19" Rack, 1U x 26"D |
| TSM1010-JB | PDS Junction Box, 10x8x10, Right Side Door Opening |
| TSM511-ECB | Enlarged Cable Box for High Cable Counts (up to 144 Cat5) |
| TSM230V-PTK | European Power Converter with Shuko Plug (for cooling fans only) |
| TSM2745-CSTR | Caster Base for 27"Wx45"D models, (4) 5" Dia. Locking Wheels, Front Swivels |
| TSM1KVME-UG-PC | UserGuard HDMI/USB/Ethernet on-off gateway with PIN+CAC authentication, for secure SIPRNet access |
| TSM281SGD-IPS2 | SafeGuard Remote Monitor, Alarm & Control System: dial rotation, lock status, door position, temp & power, with remote equipment power shutdown |

